

0		•			
Report No. : TCT2203300	2023	Date : Apr. 07, 2022		Page No.:	1 of 6
Applicant:	ShenZhen Jieshibo Te	echnology CO.,Ltd			
Address:	3Building, Xianyuxing	JIndustrial Park, Ful	he Road Gong	ghe Comm	unity,
	Shajing Street, Baoan	District, Shenzhen	City, China		
The following sample w	as submitted and iden	tified by/on behalf o	f the client as	5:	
Sample Name:	erino Dual-flavor Ope	en Pod System			
Model No.:	JY1401				
Power level in testing:	Voltage/Wattage of te	ested sample is un-ac	ljustable		
Adjustable air inlet or not:	No				
Trade Mark:					
Sample Received Date:	2022.03.30				
Testing Period:	2022.03.30—2022.0	4.07			
Test Method:	Please refer to the fo	llowing page(s).			
Test Result(s):	Please refer to the fo	llowing page(s).			

Tes	st Items	Test Requested
1	Carbonyl Compounds: Formaldehyde, Acetaldehyde, A	Acrolein, Crotonaldehyde Emission testing according to
2	Metals: Aluminum, Chromium, Iron, Nickel, Tin, Lead, C	Cadmium, Arsenic, Antimony Article 20 of Tobacco Product
3	Nicotine consistency	Directive (2014/40/EU)



Justin

Approved by

Zhan



Ryan Zhang Technical Manager



Report No. : TCT220330C023

Date : Apr. 07, 2022

Page No.: 2 of 6

Test Results:

Test Condition for test items except Nicotine consistency test:

With reference to the CORESTA RECOMMENDED METHOD Nº 81 method parameter, Afnor standardization XP D90-300-3, International Standard ISO 20768:2018 and PD CEN/TR 17236:2018, a smoke machine was used to collect the vapor.

Puff Duration			3.0s±0.1s			
Puff Volume			55mL±0.3mL			
	Puff Frequency	30s±0.5s				
	Puff of Each Group	20				
	Group Interval Time	300s±120s				
Maximum Flow			18.5mL/s±1.0mL/s			
Pressure Drop			< 50hPa			
Group			5			
	Total Number of Puff		100			
	Total Duration of Vaporization	300s				

The temperature and relative humidity of the test atmosphere during machine preparation and testing were kept within the following limits: temperature $\pm 2^{\circ}$ C, relative humidity $\pm 5\%$

Specimen Description:





Report No. : TCT220330C023

Date : Apr. 07, 2022

Page No.: 3 of 6

1. Carbonyl Compounds Content(s)

Test method: According to XP D90-300-3:2016. the aerosol generated by the e-cigarette is absorbed by the impactor containing 40mL acidified solution of 2,4-dinitrophenylhydrazine (DNPH) in acetonitrile. The solution was filtered and analyzed by reverse phase high - performance liquid chromatography and determined using a UV detector.

Test Item	CAS No.	Unit	MDL	Content(s)	
iest item	CAS NO.	Unit	NIDL	No.1	
Formaldehyde	50-00-0	µg/100puffs	0.5	4.70	
Acetaldehyde	75-07-0	µg/100puffs	0.5	ND	S
Acrolein	107-02-8	µg/100puffs	0.5	ND	
Crotonaldehyde	4170-30-3	µg/100puffs	0.5	ND	
	•		•		

Note: - $\mu g = Microgram$

- ND = Not Detected (less than MDL)
- MDL = Method Detection Limit
- E-Liquid Used: E-liquid B (AFNOR XP D90-300-3)



Report No. : TCT220330C023

Date : Apr. 07, 2022

Page No.: 4 of 6

2. Metals Content(s)

Test method: According to Afnor XP D90-300-3:2016 Annex A.6, wipe the clamp with isopropyl alcohol. Let stand for a minute. 20 ml of nitric acid was added to the impactor and placed in series with the Cambridge filter to absorb the aerosol. The Cambridge filter was removed and placed in nitric acid, shaken at 210 rpm for 30 min, and the solution was filtered and analyzed by ICP-MS.

Test Item	CAS No.	Unit	MDL		Content(s)	
Test tiem	CAS NO.	Unit	MDL		No.1	
Aluminum(Al)	7429-90-5	µg/100puffs	0.01		ND	
Chromium(Cr)	7440-47-3	µg/100puffs	0.01		ND	S
Iron(Fe)	7439-89-6	µg/100puffs	0.01		ND	
Nickel(Ni)	7440-02-0	µg/100puffs	0.01		ND	
Tin(Sn)	7440-31-5	µg/100puffs	0.01	S	ND	
Lead(Pb)	7439-92-1	µg/100puffs	0.01		ND	
Cadmium(Cd)	7440-43-9	µg/100puffs	0.01		ND	
Arsenic(As)	7440-38-2	µg/100puffs	0.01		ND	No.
Antimony(Sb)	7440-36-0	µg/100puffs	0.01		ND	
	1		1			

Note: - $\mu g = Microgram$

- ND = Not Detected (less than MDL)
- MDL = Method Detection Limit
- E-Liquid Used: E-liquid B (AFNOR XP D90-300-3)



Report No. : TCT220330C023

Date : Apr. 07, 2022

Page No.: 5 of 6

3. Nicotine Consistency Test

Test Condition: With reference to the CORESTA RECOMMENDED METHOD N° 81 method parameter and Afnor standardization XP D90-300-3, a smoke machine was used to collect the vapor.

Puff Duration	3.0s±0.1s			
Puff Volume	55mL±0.3mL			
Puff of Each Group	20			
Maximum Flow	18.5mL/s±1.0mL/s			
Pressure Drop	< 50hPa			

The temperature and relative humidity of the test atmosphere during machine preparation and testing were kept within the following limits: temperature $\pm 2^{\circ}$, relative humidity $\pm 5\%$

Test method: According to Afnor XP D90-300-3:2016 Annex A.3, wipe the clamp with isopropyl alcohol. Let stand for a minute. The aerosol generated by the e-cigarette is absorbed by the Cambridge filter. Remove the Cambridge filter and place it into a centrifuge tube, add 20 mL of Isopropyl alcohol and 0.2ml Internal standard stock solution. Shaken at 210 rpm for 30 min, and the solution was filtered and analyzed by GC-FID.

Sample No	Nicotine(CAS No.:54-11-5) Contents(mg/20Puffs)						Total	
Sample No.	Group 1*	Group 2	Group 3*	Group 4	Group 5*	AVG	(mg/100puffs)	
No.1	1.37	1.38	1.36	1.31	1.29	1.34	6.71	
Deviation(%)	2.1) -	1.3	- V	3.9	-	No.	

Note: - mg = milligram


- ND = Not Detected (less than MDL)
- MDL = Method Detection Limit = 0.05mg/20Puffs
- 1group = 20puffs
- * Values used for determination of consistency of nicotine emission
- E-Liquid Used: E-liquid A (AFNOR XP D90-300-3)
- Under the conditions of the test and with reference to AFNOR XP D90-300-3, the electronic cigarette delivers a dose of nicotine at consistent levels.



Report No. : TCT220330C023

Date : Apr. 07, 2022

Page No.: 6 of 6

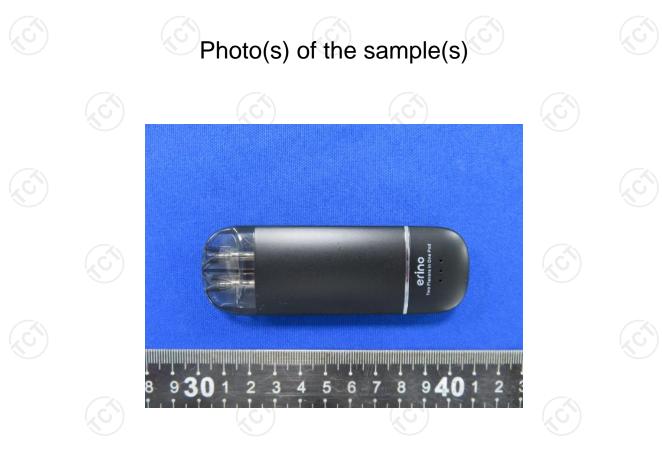

*** End of Report ***

Remark: This report is considered invalidated without the Special Seal for Inspection of the TCT. This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of TCT, this test report shall not be copied except in full and published as advertisement.

